


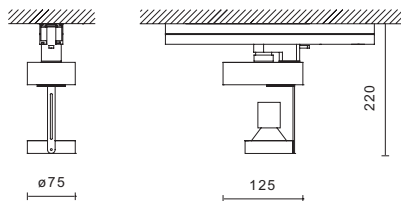


Spot orientabile su due assi, costruito in metallo stampato verniciato a polvere epossipoliestere oppure cromato tramite trattamento galvanico. Finalizzato all'uso di sorgenti luminose dicroiche a bassissima tensione oppure agli ioduri metallici con lampada Britespot. Disponibili con adattatore elettrico trifase per binario serie Due o con base per l'installazione a parete/plafone. Alimentazione elettronica inclusa. Il trasformatore utilizzato per la versione dicroica bassissima tensione è dimmerabile tramite dimmer elettronico tipo IGBT e TRIAC.

*Adjustable spotlight on a double axis built in pressed painted metal with epoxy polyester powder or galvanized chrome. It is suited for use with very low voltage dichroic light sources and metal halide lamps versions with Britespot bulbs. Available with electric triple phase adaptors for Due series tracks or with a base for wall/ceiling mounting. The electric power supply is included. The transformer used in the very low voltage dichroic version has an IGBT and TRIAC electronic dimmer.*

4264/D		QR-CB	50W	12V	GU5,3			05
4764/D		IODURI		35W	GX10			265


Con adattatore per binario DUE.  
Adapter for track DUE.



359°  180° 

4264		QR-CB	50W	12V	GU5,3			05
4764		IODURI		35W	GX10			265

Per applicazione parete/soffitto.  
For wall/ceiling fitting.



359°  180° 

CE  IP40

Alimentazione elettronica inclusa.  
Electronic ballast/transformer included.

Orientabile.  
Adjustable.

02 Nero  
Black

09 Bianco avorio opaco RAL 9010  
White ivory matt like RAL 9010

14 Cromato  
Chrome plated



4764/D loduri 35W, GX10