



Z-zero e' una sospensione minimale dallo spessore ridottissimo, soli 6mm, che esalta la bidimensionalità della sorgente di luce a LED impiegata. Viene realizzata in due versioni, una con struttura in Corian®, materiale composito di elevata purezza estetica disponibile in due colori, bianco o nero; una seconda versione in alluminio spazzolato e anodizzato.

Dotata di 8 LED controllati in corrente (350mA) da 3,5W ad elevato flusso luminoso (245lm/cad). La lampada arriva ad illuminare in modo omogeneo un'ampia superficie con una resa ad 1 mt. pari a 500 lux. La chiusura frontale è garantita da una maschera in materiale termoplastico di elevate prestazioni sul piano tecnico come ottima resistenza agli urti, extra trasparenza, glow-wire test 850°C.

La lampada viene fornita completa di due alimentatori elettronici, cavetti di sospensione in acciaio zincato da 1,2mm, cavo elettrico trasparente da 200cm e rosone verniciato. L'installazione a sospensione avviene mediante morsetti a frizione che consentono una facile e rapida regolazione.

Z-zero is a minimalist suspended lamp with a very narrow thickness, just 6mm, which highlights the depth of the LED light source used. It is created in two versions with a structure in Corian®, a composite material with great aesthetic purity available in two colours - white or black. Another version is available in brushed and anodized aluminium.

Equipped with 8 current-controlled LED (350mA) measuring 3.5W with a high light flow (245lm/cad.) the light extends in a balanced way over the surface with an output of 1 metre equal to 500 lux. The frontal closure is provided by a guard in thermoplastic material that has high technological performance including shock resistance, extra transparency and in glow-wire testing it performs to 850°C.

The light is supplied with two electronic power supply units, suspension cords in galvanized steel measuring 1.2 mm, electric transparent 200 cm cable and a painted rose. The suspended installation is carried out with friction blocks that allow for regulating quickly and easily.


7900



8 LED

28W

230V

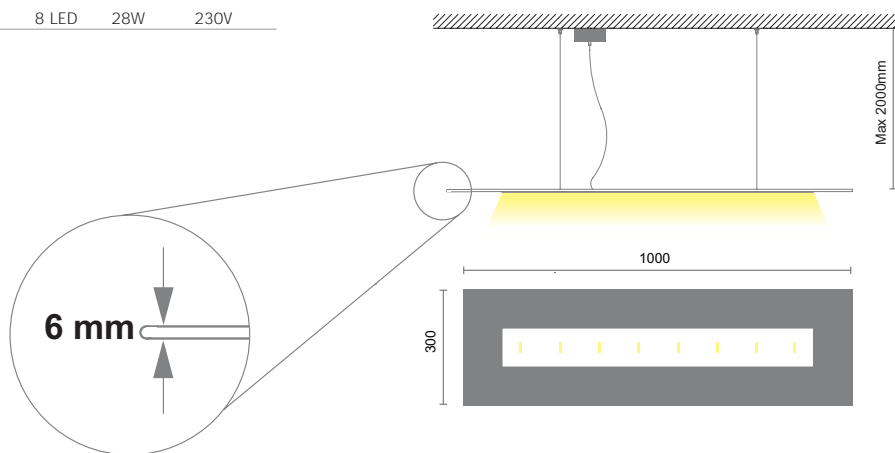

CE IP43

Sospensione in lastra
di alluminio 6 mm
Suspension in aluminium
extrusion 6 mm

Alimentazione inclusa.
Supply included.

Corrente nominale
Nominal current

350 mA

Potenza W
Power W

3.5W Led singolo

Angolo luminoso
Luminose beam

120°

Temperatura colore
Colour temperature

3500 °K

Flusso luminoso (lm)
Luminous flux

245

20 Anodizzato naturale
Natural anodised





7900 8 Led



7900 8 Led



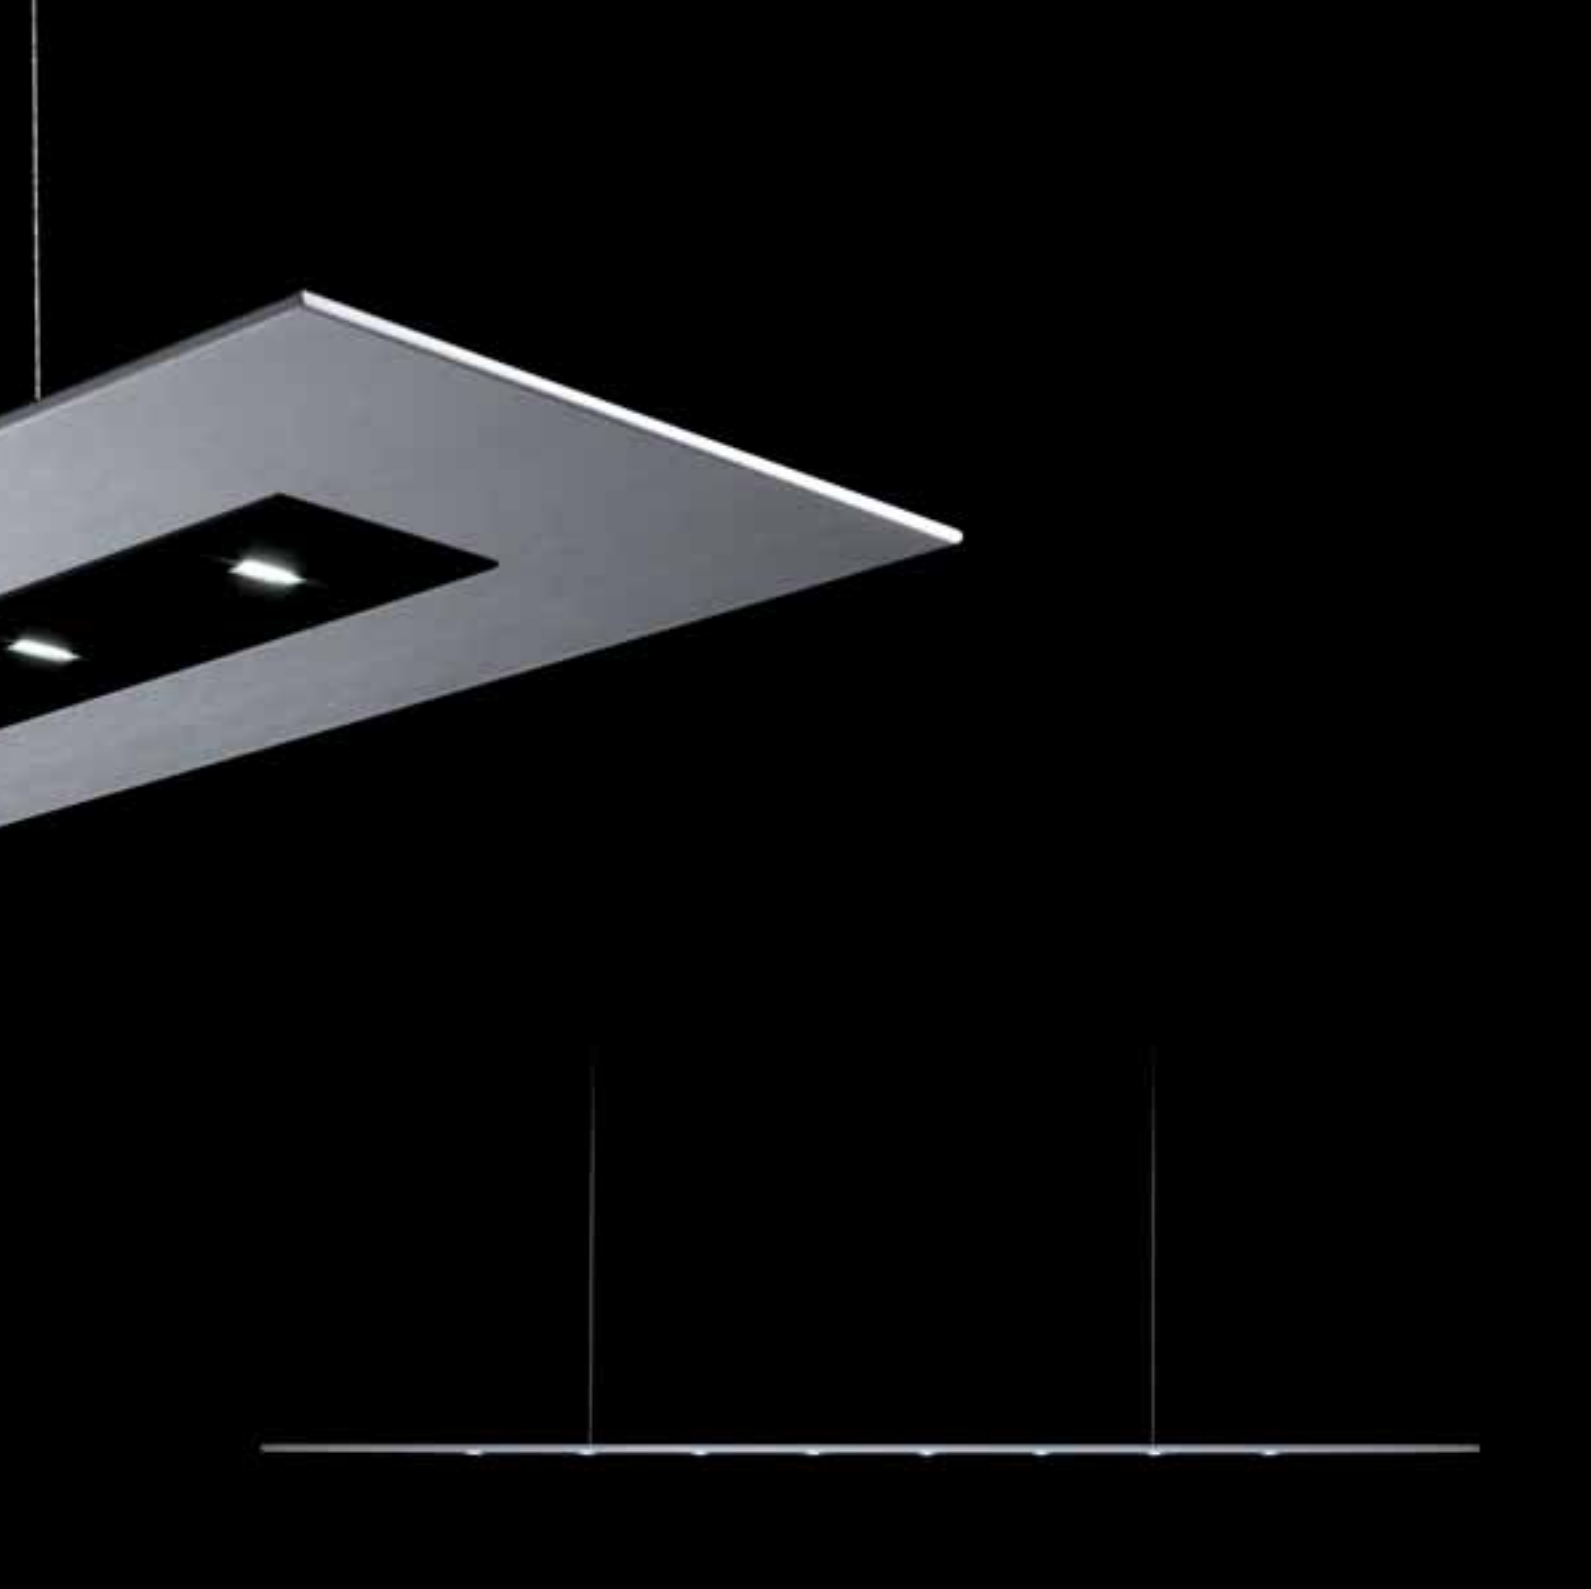

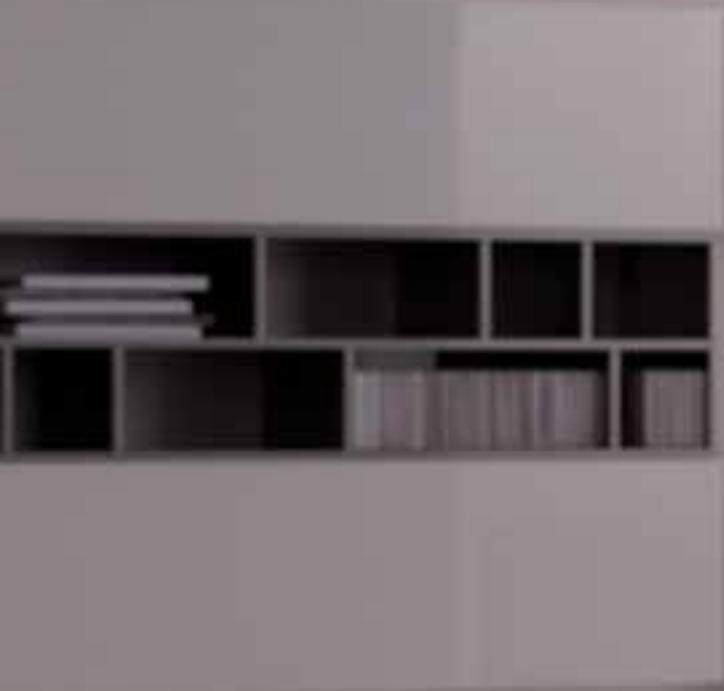


7902



8 LED

28W

230V

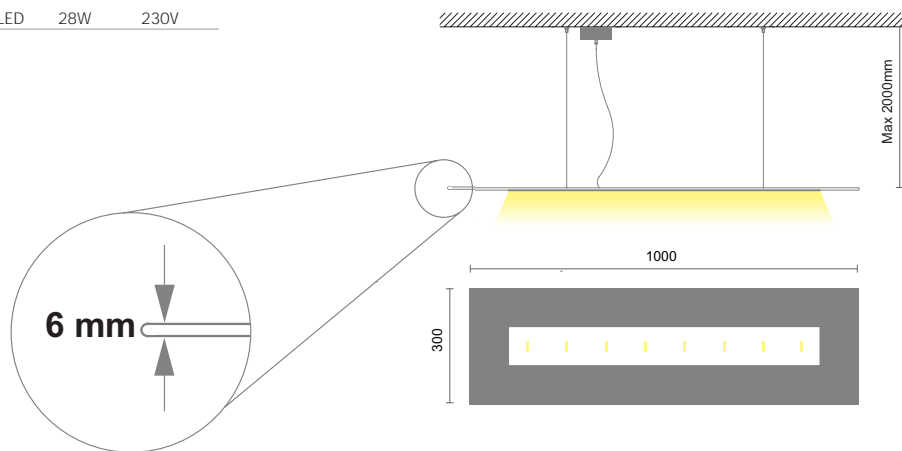

CE IP43

Sospensione in corian 6 mm
Corian suspension 6 mm

Alimentazione inclusa.
Supply included.

Corrente nominale
Nominal current

350 mA

Potenza W
Power W

3.5W Led singolo

Angolo luminoso
Luminose beam

120°

Temperatura colore
Colour temperature

3500 °K

Flusso luminoso (lm)
Luminous flux

245

Finiture in Corian®

NE Corian® nero
Corian® black

BI Corian® bianco
Corian® white